


SUSPENSION WHEEL AND TIRE CHART

KIT NUMBER	COMPATIBLE WITH O.E. WHEELS ^[1]	DEVELOPMENT TIRE ^[2]		DEVELOPMENT WHEEL ^[2]		TOTAL BACKSPACING
		SIZE	ACTUAL SIZE ^[1]	SIZE	BACKSPACING	
RS62100	YES ^[8]	—	—	17 (min)	5.0	—
RS6444	NO	31x10.5R-15	—	—	—	—
RS64901	YES	265/70R17	31.6x10.4	17x8	4.5 - 5.0	—
OPTIONAL RS64901	—	255/75R17	32.1x10.0	17x8	4.5 - 5.0	—
RS64902	YES	275/65R20	34.0x11.0	20x9	6.0	—
OPTIONAL RS64902	—	285/70R18	33.7x11.2	18x9	6.0	—
RS64903	YES	265/70R17	31.6x10.4	17x8	4.5 - 5.0	—
RS6501	YES	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS6503	YES	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS6504	YES	33x12.5R-15	32.8x12.5	15x8	3.8	—
OPTIONAL RS6504	—	35x12.5R-15	34.8x12.5	15x8	3.8	—
RS6506	YES	33x12.5R-15	32.8x12.5	15x8	3.8	—
RS6511B	YES	325/60R20	35.5x13	20x9	6.3	7.3
RS6514B	YES	325/60R20	35.5x13	20x9	6.3	—
RS6515B	YES	35x12.5R-17	34.8x12.5	17x9	6.3	—
RS6518B	YES ^[10]	35x12.5R-18	34.8x12.5	18x9	4.5	—
RS6519B	YES ^[10]	35x12.5R-18	34.8x12.5	18x9	5.0	—
RS6524B	YES	325/60R20	35.5x13	20x9	6.3	—
OPTIONAL RS6524B	—	37x12.5R-20	36.6x12.5	20x9	6.3	—
RS6525B	YES	325/60R20	35.5x13	20x9	6.3	—
OPTIONAL RS6552B	—	37x12.5R-20	36.9x13.4	20x9	6.3	—
RS6545B	NO	285/75R16	33.0x11.3	16x8 ^[4]	4.5	—
OPTIONAL RS6545B ^[3] ^[5]	—	35x12.5R-17	34.9x12.9	17x8 ^[4]	4.5	—
RS6547B	NO	285/75R16	33.0x11.3	16x8 ^[4]	4.5	—
OPTIONAL RS6547B ^[3] ^[5]	—	35x12.5R-17	34.9x12.9	17x8 ^[4]	4.5	—
RS6548B	YES	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6548B ^[3] ^[5]	—	35x12.5R-17	34.9x12.9	17x8	4.5	5.9
RS6550B	YES	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6550B ^[3] ^[5]	—	35x12.5R-17	34.9x12.9	17x8	4.5	—
RS6551B	YES	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6551B ^[3] ^[5]	—	35x12.5R-17	34.9x12.9	17x8	4.5	—
RS6554B	YES ^[9]	35x12.5R-18	34.8x12.5	18x9	6.0	—
RS6556B	NO	37x12.5R-17	36.9x13.4	17x10	5.0	—
OPTIONAL RS6556B ^[3]	—	40x13.5R-17	39.8x14.6	17x9	6.0	7.4
RS6557B	NO	37x12.5R-17	36.9x13.4	17x10	5.0	—
OPTIONAL RS6557B	—	40x13.5R-17	39.8x14.6	17x9	6.0	7.4
RS6558B	NO	325/60R20	35.5x13	20x9	5.0 ^[5]	—
OPTIONAL RS6558B	—	37x12.5R-20	36.6x12.5	20x9	5.0 ^[5]	6.0
RS6564B	YES ^[9]	35x12.5R-18	34.8x12.5	18x9	6.0	—
RS6569B ^[6]	NO	285/70R17	33.0x11.3	17x8	4.5	—
RS6573B	YES	35x12.5R-17	34.8x12.5	17x8.5	5.0	—
RS6578B	YES	37x12.5R-17	37x12.9	17x8	6.3	7.3
RS6579B	YES	37x12.5R-17	37x12.9	17x8	6.3	7.3
RS6581B	YES	35x12.5R-17	34.8x12.5	17x8	5.0	6.5
RS6582B ^[6]	YES ^[12]	315/70R17	34.5x12	17x8	5.5	—
RS6583B ^[6]	YES ^[12]	315/70R17	34.5x12	17x8	5.5	6.5
OPTIONAL RS6583B ^[5]	—	35x12.5R-17	34.9x12.5	17x8	4.5	6.5
RS6587B	YES	35x12.5R-17	34.8x12.5	17x8	5.0	6.0
RS6592	YES	265/75R16	31.8x10.5	16x8	5.5	—
RS6593	YES	265/75R16	31.8x10.5	16x8	5.5	—
RS6594B	YES	35x12.5R-18	34.8x12.5	18x9	6.0	6.7
RS66000	YES	31x11.5R-15	31x11.5	15x8	3.8	—
OPTIONAL RS66000	—	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66001	YES	31x11.5R-15	31x11.5	15x8	3.8	—
OPTIONAL RS66001	—	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66002	YES	31x10.5R-15	—	15x8	3.8	—
OPTIONAL RS66002	—	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66003	YES	31x10.5R-15	—	15x8	3.8	—
OPTIONAL RS66003	—	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66102B	YES ^[7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66102B ^[5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66103	YES ^[7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66103 ^[5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66103B	YES ^[7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66103B ^[5]	—	37x12.5R-17	36.3x12.8	—	—	—

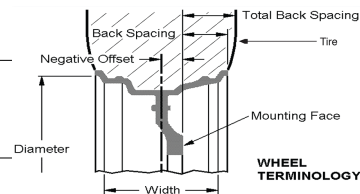


FOOTNOTES

- ^[1] Designates when the OEM wheel is compatible with the applicable Rancho® suspension. The development or optional tire may not be compatible with the OEM wheel.
- ^[2] Use of optional wheel and tire will require trimming or modification. Actual tire size varies between manufacturers.
- ^[3] RS6545, RS6547 – vehicles with OEM 17" wheels cannot use 16" wheels or smaller.
- ^[4] RS6558B requires 4.5" of backspacing on 16", 17" and 18" wheels.
- ^[5] Trimming required
- ^[6] Minor trimming required
- ^[7] OE wheels w/ OE tires - Street use only; rear sway bar link will contact rim in articulation.
- ^[8] OE wheel with OE tie rod / drag link.
- ^[9] Remove wheel weights for OE 17" wheels and up
- ^[10] OE wheels 18" and up
- ^[12] 20" OE wheels only

If your kit is not listed, please refer to the instruction sheet for fitment information. All measurements are in inches. Trimming or modification may be required to provide proper tire clearance. Actual tire size varies between manufacturers.

SUSPENSION WHEEL AND TIRE CHART

KIT NUMBER	COMPATIBLE WITH O.E. WHEELS [1]	DEVELOPMENT TIRE [2]		DEVELOPMENT WHEEL [2]		TOTAL BACKSPACING
		SIZE	ACTUAL SIZE [4]	SIZE	BACKSPACING	
RS66104	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66104 [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66104B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66104B [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66105	YES [7]	35x15.5R-18	—	18x9	4.5	5.9
RS66105B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66105B [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66106B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66106B [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66107	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
RS66107B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66107B [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66108BR5	YES [7]	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66108BR5	—	305/65R17	33x11.5	—	—	—
RS66108BR9	YES [7]	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66108BR9	—	305/65R17	33x11.5	—	—	—
RS66109BR5	YES [7]	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66109BR5	—	305/65R17	33x11.5	—	—	—
RS66109BR9	YES [7]	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66109BR9	—	305/65R17	33x11.5	—	—	—
RS66110B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
RS66150	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66150 [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66150B	YES [7]	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66150B [5]	—	37x12.5R-17	36.3x12.8	—	—	—
RS66300R5	YES	33x11.50	33x11.50	—	5.5	—
RS66301B	YES** [11]	325/60R20	—	20x9	5.0	6.9
RS66302B	YES** [11]	325/60R20	—	20x9	5.0	6.9
RS66303R7	YES	285/70R17	—	—	—	—
RS66304R7	YES	285/70R17	—	—	—	—
RS66350R5	YES	33x11.50	33x11.50	—	5.5	—
RS66351R5	YES	33x11.50	33x11.50	—	5.5	—
RS66400B	YES	35x12.5R-17	—	17x8.5	5.0	—
RS66401B	YES*	295/60R20	34x11.6	20x9	5.0	6.5
RS66450R7	YES	315/75R17	33.5x12.4	17 (min)	6.0	—
RS66451R9	YES*	35x12.5R-17	34.7x12.5	17x9	5.5	6.8
RS66452B	YES*	37x12.5R-20	36.6x12.5	20x9	5.5	6.8
RS66453B	YES*	37x12.5R-20	36.6x12.5	20x9	5.5	6.8
RS66500B	YES*	35x12.5R-18	34.8x12.5	18x9	5.6	—
RS66501B	YES*	35x12.5R-18	34.8x12.5	18x9	5.6	—
RS66503R7	YES	35x12.5R-18	34.8x12.5	—	—	—
RS66551B	YES	35x12.5R-20	34.8x12.5	20x9	6.3	—
RS66901R9	YES	265/70R17	31.6x10.4	17x8	4.5 - 5.0	—
OPTIONAL RS66901R9	—	255/75R17	32.1x10.0	17x8	4.5 - 5.0	—
RS66903R7	YES	265/70R17	31.6x10.4	17x8	4.5 - 5.0	—
OPTIONAL RS66903R7	—	255/75R17	32.1x10.0	17x8	4.5 - 5.0	—
RS66507R9	YES	275/65R18	32.5x10.7	18x7.5	6.0	—
OPTIONAL RS66507R9 [5]	—	295/70R18	34.3x11.6	18x9	5.5	—
RS66504R9	NO	33x12.5R-15	32.7x12.4	18x7.5	6.0	—
RS64501R9	YES	275/65R18	32.5x10.7	18x7.5	6.0	—
OPTIONAL RS64501R9 [5]	—	295/70R18	34.3x11.6	18x9	5.5	—
RS66311R9 [6]	YES*	33x12.5R-18	32.8x12.5	18x9	4.75 - 5.0	—
OPTIONAL RS66311R9 [5]	—	285/60R20	33.7x11.50	20x9	4.75 - 5.0	—
RS66310R9 [6]	NO	285/70R17	33.7x11.20	17x8	5.0	—
RS64302 [6]	YES*	33x12.5R-18	32.8x12.5	18x9	4.75 - 5.0	—
OPTIONAL RS64302 [5]	—	285/60R20	33.7x11.50	20x9	4.75 - 5.0	—
RS66905R9K	YES	265/70R17	31.6x10.4	17x8	4.5 - 5.0	—
OPTIONAL RS66905R9K	—	255/75R17	32.1x10.0	17x8	4.5 - 5.0	—
RS66121BR5 / 9	YES [7]	33x12.5R17	32.5"x12.5"	17x9	4.5	—
OPTIONAL RS66121BR5 / 9 [5]	—	315/70R17	34.7"x12.7"	17x9	4.5	—
RS66122BR5 / 9	YES [7]	315/70R17	34.7"x12.7"	17x9	4.5	—
RS66123B [5]	YES [7]	37x12.5R17	36.5"x12.5"	17x9	4.5	—
RS66124BR5 / 9	YES [7]	33x12.5R17	32.5"x12.5"	17x9	4.5	—
OPTIONAL RS66124BR5 / 9 [5]	—	315/70R17	34.7"x12.7"	17x9	4.5	—
RS66125B [5]	YES [7]	315/70R17	34.7"x12.7"	17x9	4.5	—

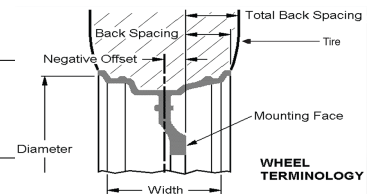


FOOTNOTES

- [1] Designates when the OEM wheel is compatible with the applicable Rancho® suspension. The development or optional tire may not be compatible with the OEM wheel.
- [2] Use of optional wheel and tire will require trimming or modification. Actual tire size varies between manufacturers.
- [5] Trimming required
- [6] Minor trimming required
- * Stock wheels and tires only.
- ** Wheel Spacer required, included in kit.
- [7] OE wheels w/ OE tires - Street use only; rear sway bar link will contact rim in articulation.
- [11] OE wheels 18" and up; w/OE Tires

If your kit is not listed, please refer to the instruction sheet for fitment information. All measurements are in inches. Trimming or modification may be required to provide proper tire clearance. Actual tire size varies between manufacturers.

SUSPENSION WHEEL AND TIRE CHART

KIT NUMBER	COMPATIBLE WITH O.E. WHEELS ¹	DEVELOPMENT TIRE ²		DEVELOPMENT WHEEL ²		TOTAL BACKSPACING
		SIZE	ACTUAL SIZE ³	SIZE	BACKSPACING	
OPTIONAL RS66125B ⁵	—	37x12.5R17	36.5"x12.5"	17x9	4.5	—
RS66127BR5 / 9	YES	315/70R17	34.7"x12.7"	17x9	4.5	—
RS66128B ⁵	YES*	37x12.5R17	36.5"x12.5"	17x9	4.5	—
OPTIONAL RS66128B ⁵	—	38x13.50R17	37.5"x13.5"	17x9	4.5	—

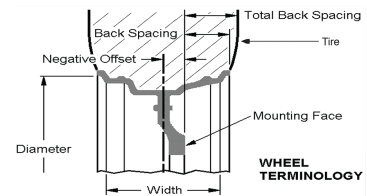

FOOTNOTES

- ¹ Designates when the OEM wheel is compatible with the applicable Rancho® suspension. The development or optional tire may not be compatible with the OEM wheel.
- ² Use of optional wheel and tire will require trimming or modification. Actual tire size varies between manufacturers.
- ⁵ Trimming required
- * Stock wheels and tires only.