



rockGEAR™ — RS62117 Rear Differential Glide Plate

Fits 2020-2018 Jeep Wrangler JL Rubicon M220 (12 Bolt Dana 44) Rear Axle

READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION

P/N	DESCRIPTION	QTY.
RS176911	Glide Plate	1
RS176923	Pinion Strap	1
RS860859	Sub Assy, JL Glide Plate Hardware	1
RS770128	Washer M8	8
RS603613	HHCS, M8-1.25 X 30mm	4
RS7649	HHCS, M8-1.25 X 40mm	2
RS603112	Nut, M8-1.25 Nylock	2
RS42702	Thread Lock	1
RS82117	Instruction	1



- 1) Remove four bolts from the bottom of the front differential as shown in Illustration 1. Do not remove cover.
- 2) Loosely attach glide plate RS176911 to the differential cover with the supplied M8x30mm bolts and washers. See Illustration 2.
- 3) Place pinion strap RS176923 over the rear of the differential housing. See Illustration 3.
- 4) Loosely attach glide plate rear of differential housing with pinion strap and M8x40mm hardware.
- 5) Snug the lower then upper differential cover bolts.
- 6) Torque the four differential cover bolts to 25 lb-ft.
- 7) Torque Pinion strap hardware to 20 lb-ft.
- 8) Inspect cover for fluid leaks periodically. If a leak is detected, remove and reseal cover per manufacturer's recommendations.

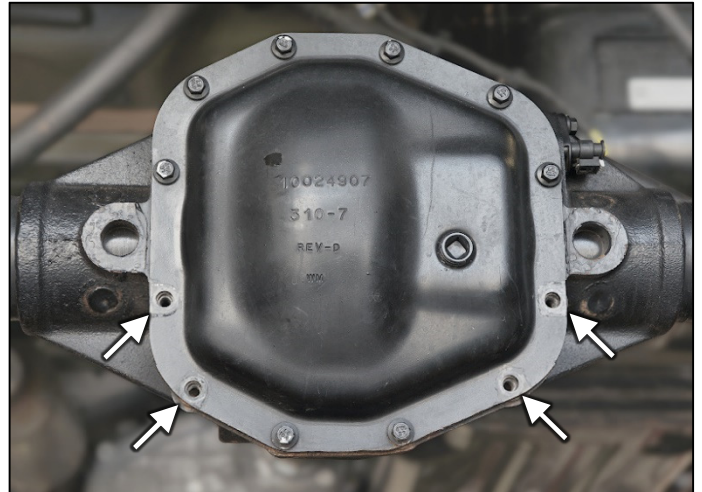


Illustration 1

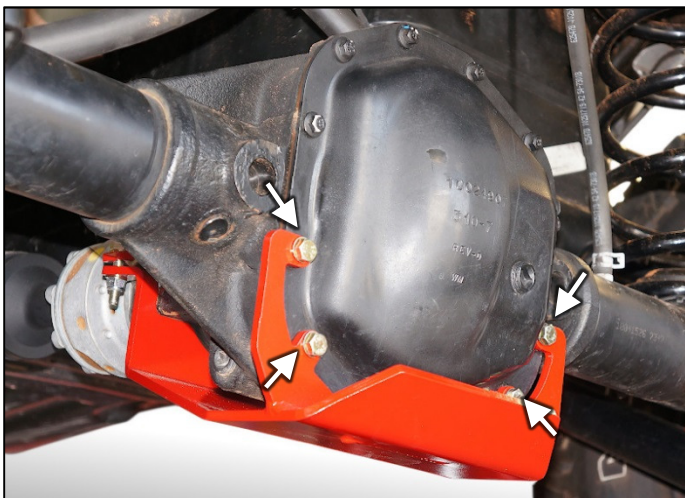


Illustration 2



Illustration 3