


SUSPENSION WHEEL AND TIRE CHART

KIT NUMBER	COMPATIBLE WITH O.E. WHEELS ¹	DEVELOPMENT TIRE ²		DEVELOPMENT WHEEL ²		TOTAL BACKSPACING
		SIZE	ACTUAL SIZE ¹	SIZE	BACKSPACING	
RS62100	YES	—	—	Min. 17"	Max. 5.0"	—
RS6444	—	31x10.5R-15	—	—	—	—
RS64901	YES	265/70R17	31.6x10.4	17x8	4.5	—
OPTIONAL RS64901	—	255/75R17	32.1x10.0	—	—	—
RS64902	YES	275/65R20	34.0x11.0	20x9	6.0	—
OPTIONAL RS64902	—	285/70R18	33.7x11.2	—	—	—
RS64903	YES	265/70R17	31.6x10.4	17x8	4.5	—
RS6501	YES	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS6503	YES	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS6504	YES	33x12.5R-15	32.8x12.5	15x8	3.8	—
OPTIONAL RS6504	—	35x12.5R-15	34.8x12.5	15x8	3.8	—
RS6506	YES	33x12.5R-15	32.8x12.5	15x8	3.8	—
RS6511B	YES	325/60R20	35.5x13	20x9	6.3	7.3
RS6514B	YES	325/60R20	35.5x13	20x9	6.3	—
RS6515B	—	35x12.5R-17	—	Min. 17"	6.25	—
RS6518B	YES	35x12.5R-18	34.8x12.5	18x9	4.5	—
RS6519B	YES	35x12.5R-18	34.8x12.5	18x9	4.5	—
RS6524B	—	37x12.5R-20	36.6x12.5	20x9	6.3	—
RS6525B	YES	325/60R20	35.5x13	20x9	6.3	—
RS6545B	NO	285/75R16	33.0x11.3	16x8 ⁴	4.5	—
OPTIONAL RS6545B ³	—	35x12.5R-17	34.9x12.9	17x8 ⁴	4.5	—
RS6547B	—	285/75R16	33.0x11.3	16x8 ⁴	4.5	—
OPTIONAL RS6547B ³	—	35x12.5R-17	34.9x12.9	17x8 ⁴	4.5	—
RS6548B	YES	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6548B ³	YES	35x12.5R-17	34.9x12.9	17x8	4.5	5.9
RS6550B	—	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6550B ³	—	35x12.5R-17	34.9x12.9	17x8	4.5	—
RS6551B	—	285/75R16	33.0x11.3	16x8	4.5	—
OPTIONAL RS6551B ³	—	35x12.5R-17	34.9x12.9	17x8	4.5	—
RS6554B	NO	35x12.5R-18	34.8x12.5	18x9	6.0	—
RS6556B	NO	37x12.5R-17	36.9x13.4	17x10	5.0	—
OPTIONAL RS6556B ³	—	40x13.5R-17	39.8x14.6	17x9	6.0	7.4
RS6557B	NO	37x12.5R-17	36.9x13.4	17x10	5.0	—
OPTIONAL RS6557B	—	40x13.5R-17	39.8x14.6	17x9	6.0	7.4
RS6558B	NO	325/60R20	35.5x13	20x9	5.0 ⁵	—
OPTIONAL RS6558B	—	37x12.5R-20	36.6x12.5	20x9	5.0 ⁵	6.0
RS6564B	NO	35x12.5R-18	34.8x12.5	18x9	6.0	—
RS6569B	—	285/70R17	33.0x11.3	17x8	4.5	—
RS6573B	YES	35x12.5R-17	34.8x12.5	17x8.5	5.0	—
RS6578B	YES	37x12.5R-17	37x12.9	17x8	6.3	7.3
RS6579B	YES	37x12.5R-17	37x12.9	17x8	6.3	7.3
RS6581B	YES	315/70R17	34.5x12	17x8	4.5	5.5
RS6582B	YES	315/70R17	34.5x12	17x8	5.5	—
RS6583B	YES	315/70R17	34.5x12	17x8	5.5	6.5
OPTIONAL RS6583B	—	35x12.5R-17	34.9x12.5	17x8	4.5	6.5
RS6587B	YES	315/70R17	34.5x12	17x8	4.5	5.5
RS6592	YES	265/75R16	31.8x10.5	16x8	5.5	—
RS6593	YES	265/75R16	31.8x10.5	16x8	5.5	—
RS6594B	YES	35x12.5R-18	34.8x12.5	18x9	6.0	6.7
RS66000	NO	31x11.5R-15	31x11.5	15x8	3.8	—
OPTIONAL RS66000	NO	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66001	NO	31x11.5R-15	31x11.5	15x8	3.8	—
OPTIONAL RS66001	NO	33x12.5R-15	32.7x12.4	15x8	3.8	—
RS66002	YES	31x10.5R-15	—	15x8	3.75	—
RS66003	YES	31x10.5R-15	—	15x8	3.75	—
RS66102B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66102B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66103	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66103	—	37x12.5R-17	36.3x12.8	—	—	—
RS66103B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66103B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66104	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66104	—	37x12.5R-17	36.3x12.8	—	—	—
RS66104B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66104B	—	37x12.5R-17	36.3x12.8	—	—	—

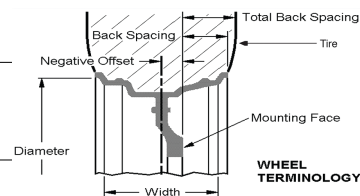

FOOTNOTES

¹ Designates when the OEM wheel is compatible with the applicable Rancho® suspension. The development or optional tire may not be compatible with the OEM wheel.

² Use of optional wheel and tire will require trimming or modification. Actual tire size varies between manufacturers.

³ RS6545, RS6547 – vehicles with OEM 17" wheels cannot use 16" wheels or smaller.


⁴ RS6558B requires 4.5" of backspacing on 16", 17" and 18" wheels.

* Stock wheels and tires only.

If your kit is not listed, please refer to the instruction sheet for fitment information. All measurements are in inches. Trimming or modification may be required to provide proper tire clearance. Actual tire size varies between manufacturers.

SUSPENSION WHEEL AND TIRE CHART

KIT NUMBER	COMPATIBLE WITH O.E. WHEELS ¹	DEVELOPMENT TIRE ²		DEVELOPMENT WHEEL ²		TOTAL BACKSPACING
		SIZE	ACTUAL SIZE ¹	SIZE	BACKSPACING	
RS66105	NO	35x15.5R-18	—	18X9	4.5	5.9
RS66105B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66105B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66106B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66106B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66107	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
RS66107B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66107B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66108BR5	YES*	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66108BR5	—	305/65R17	33x11.5	—	—	—
RS66108BR9	YES*	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66108BR9	—	305/65R17	33x11.5	—	—	—
RS66109BR5	YES*	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66109BR5	—	305/65R17	33x11.5	—	—	—
RS66109BR9	YES*	255/80R17	—	17x9	4.5	5.9
OPTIONAL RS66109BR9	—	305/65R17	33x11.5	—	—	—
RS66110B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
RS66150	NO	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66150	—	37x12.5R-17	36.3x12.8	—	—	—
RS66150B	NO	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66150B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66151	NO	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66151	—	37x12.5R-17	36.3x12.8	—	—	—
RS66151B	NO	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66151B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66152	—	33x12.5R-15	—	15x8	3.75	—
RS66155B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66155B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66156B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66156B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66157B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66157B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66158B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66158B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66159B	YES*	35x12.5R-17	34.8x12.5	17x9	4.5	5.9
OPTIONAL RS66159B	—	37x12.5R-17	36.3x12.8	—	—	—
RS66160B	NO	35x12.5R-18	34.8x12.5	18x9	4.5	5.9
RS66161B	NO	35x12.5R-18	34.8x12.5	18x9	4.5	5.9
RS66162B	NO	35x12.5R-18	34.8x12.5	18x9	4.5	5.9
RS66163B	NO	35x12.5R-18	34.8x12.5	18x9	4.5	5.9
RS66300R5	YES	One Size Over	O.E. Max.	Check for Clearance	—	—
RS66301B	YES**	325/60R20	—	20x9	5.0	6.9
RS66302B	YES**	325/60R20	—	20x9	5.0	6.9
RS66303R7	—	285/70R17	—	—	—	—
RS66304R7	—	285/70R17	—	—	—	—
RS66350R5	YES	One Size Over	O.E. Max.	Check for Clearance	—	—
RS66351R5	YES	One Size Over	O.E. Max.	Check for Clearance	—	—
RS66400B	YES	35x12.5R-17	—	17x8.5	5.0	—
RS66401B	YES*	295/60R20	—	20x9	5.0	6.5
RS66450R7	YES	315/75R17	—	Min. 17"	6.0	—
RS66451R9	YES*	35x12.5R-17	—	17x9	5.5	6.8
RS66452B	YES*	37x12.5R-20	—	20x9	5.5	6.8
RS66453B	—	37x12.5R-20	36.6x12.5	20x9	5.5	6.8
RS66500B	YES*	35x12.5R-18	34.8x12.5	19x9	5.6	—
RS66501B	YES*	35x12.5R-18	34.8x12.5	19x9	5.6	—
RS66503R7	—	35x12.5R-18	—	—	—	—
RS66551B	YES	35x12.5R-20	—	20x9	6.3	—
RS66901R9	YES	285/70R17	—	17x8	4.75	6.0
RS66902R7	YES	275/65R20	34.0x11.0	20x9	6.0	—
OPTIONAL RS66902R7	—	265/70R18	33.7x11.2	—	—	—
RS66903R7	YES	265/70R17	31.6x10.4	17x8	4.5	—
OPTIONAL RS66903R7	—	255/75R17	32.1x10.0	—	—	—

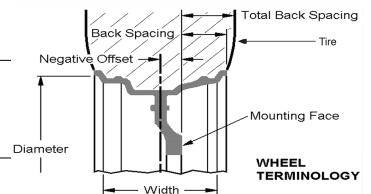

FOOTNOTES

- ¹ Designates when the OEM wheel is compatible with the applicable Rancho® suspension. The development or optional tire may not be compatible with the OEM wheel.
- ² Use of optional wheel and tire will require trimming or modification. Actual tire size varies between manufacturers.
- * Stock wheels and tires only.
- ** Wheel Spacer required, included in kit.

If your kit is not listed, please refer to the instruction sheet for fitment information. All measurements are in inches. Trimming or modification may be required to provide proper tire clearance. Actual tire size varies between manufacturers.